





			SUDABELT MEDICAL CO LTD  LAGOS  NIGERIA											
A	24/FEB/2023	Based on the drawing MM-B329270-DEP-00-A (DC-376447)												
REV	DATE	MODIFICATIONS												
01 - Cover Sheet 02 - Equipment Layout 03 - Structural - Electrical Layout 04 - Structural Details 05 - Power Requirements - Power Distribution 06 - Detailed Schematics of PDB 07 - HVAC - Environment - Equipment dimensions 08 - Interconnections - Delivery 09 - Disclaimer - Site Readiness			<div><div></div><div>GE Healthcare</div><div>Efosa Amayo</div><div>-</div><div>Efosa.amayo@ge.com</div></div>											
A mandatory component of this drawing set is the GE Healthcare Pre Installation manual. Failure to reference the Pre Installation manual will result in incomplete documentation required for site design and preparation. Pre Installation documents for GE Healthcare products can be accessed on the web at: <a href="http://www.gehealthcare.com/siteplanning">www.gehealthcare.com/siteplanning</a>			SENOPHAPHE CRYSTAL NOVA FINAL STUDY											
			Drawn by		Verified by		Concession		S.O. (GON)		PIM Manual		Rev	
GE does not take responsibility for any damages resulting from changes on drawings made by others. Errors may occur by not referring to the complete set of final issue drawing. GE cannot accept responsibility for any damage due to the partial use of GE final issue drawings, however caused. All dimensions are in millimeters unless otherwise specified. Do not scale from printed pdf files. GE accepts no responsibility or liability for defective work due to scaling from these drawings.			D. Fabiś		T. Deme		-		-		6673206-8EN		4	
			Format	Scale	File Name				Date				Sheet	
			A3	1:50	MAM-B329280-FIN-00-A.DWG				24/FEB/2023				01/09	

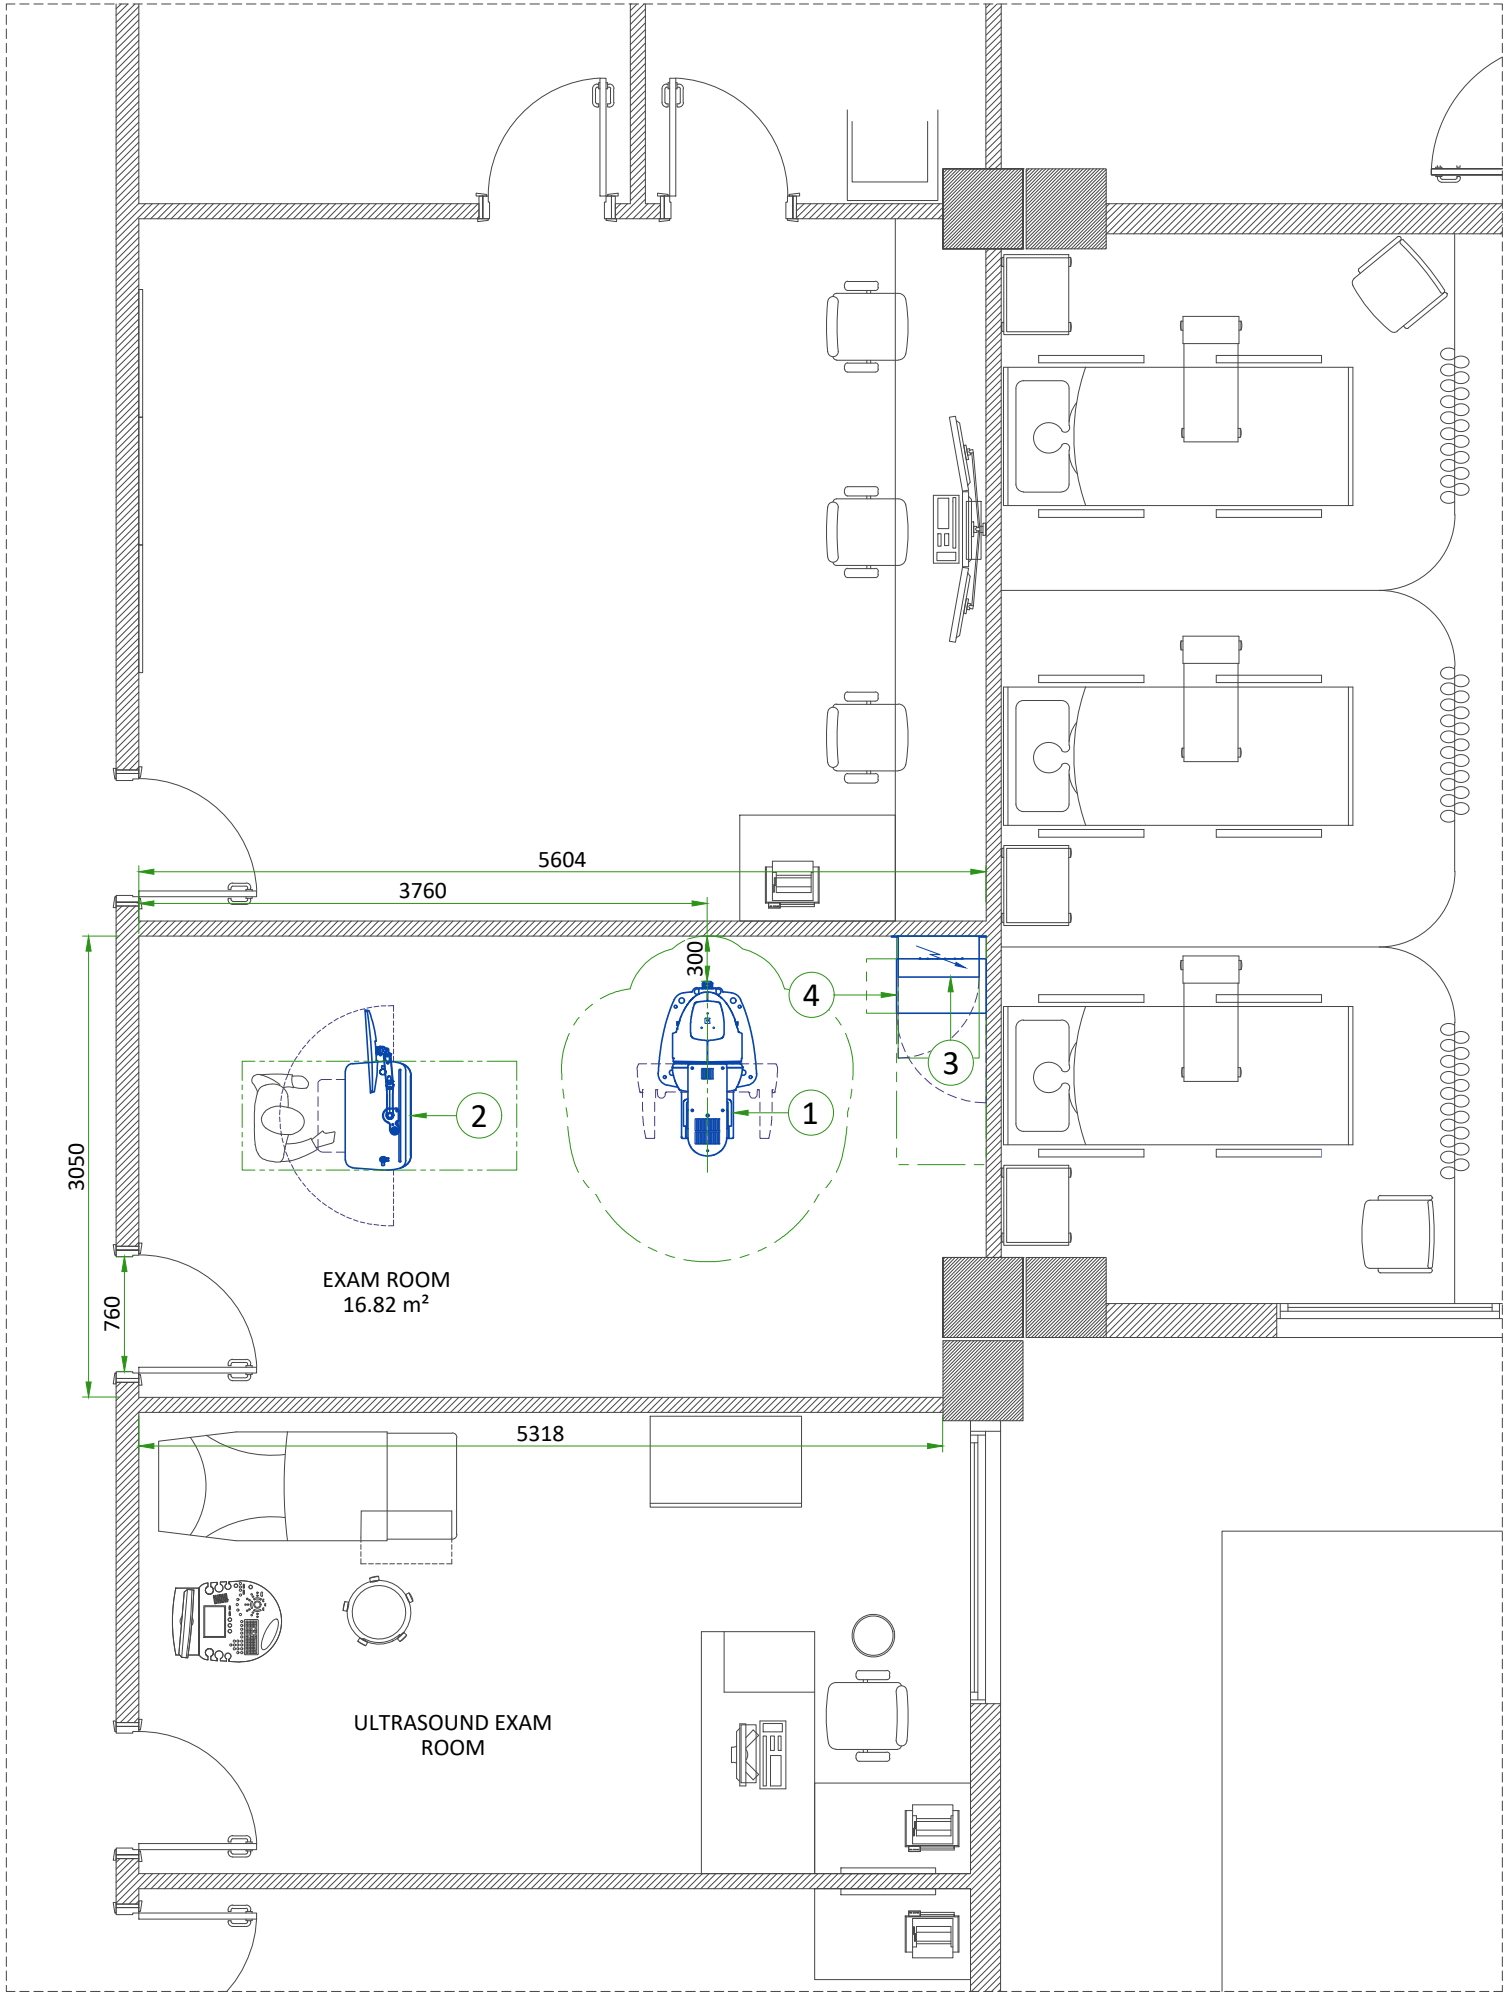

EQUIPMENT LAYOUT

ITEM	DESCRIPTION	DIMENSIONS LxWxH (mm)	WEIGHT (kg)
1	GANTRY	1104x650x2002	308.6
2	OPERATOR CONSOLE	616x1130x1853	97.2
3	GENERATOR CABINET	360x592x690	91.8
4	POWER DISTRIBUTION BOX (PDB)	270x535x735	90
STRUCTURE - ACCORDING TO RECEIVED DRAWING			
WALL - ACCORDING TO RECEIVED DRAWING			
EXAM ROOM HEIGHT			
FINISHED FLOOR TO SLAB HEIGHT			-
FALSE CEILING HEIGHT			min. 2.50 m

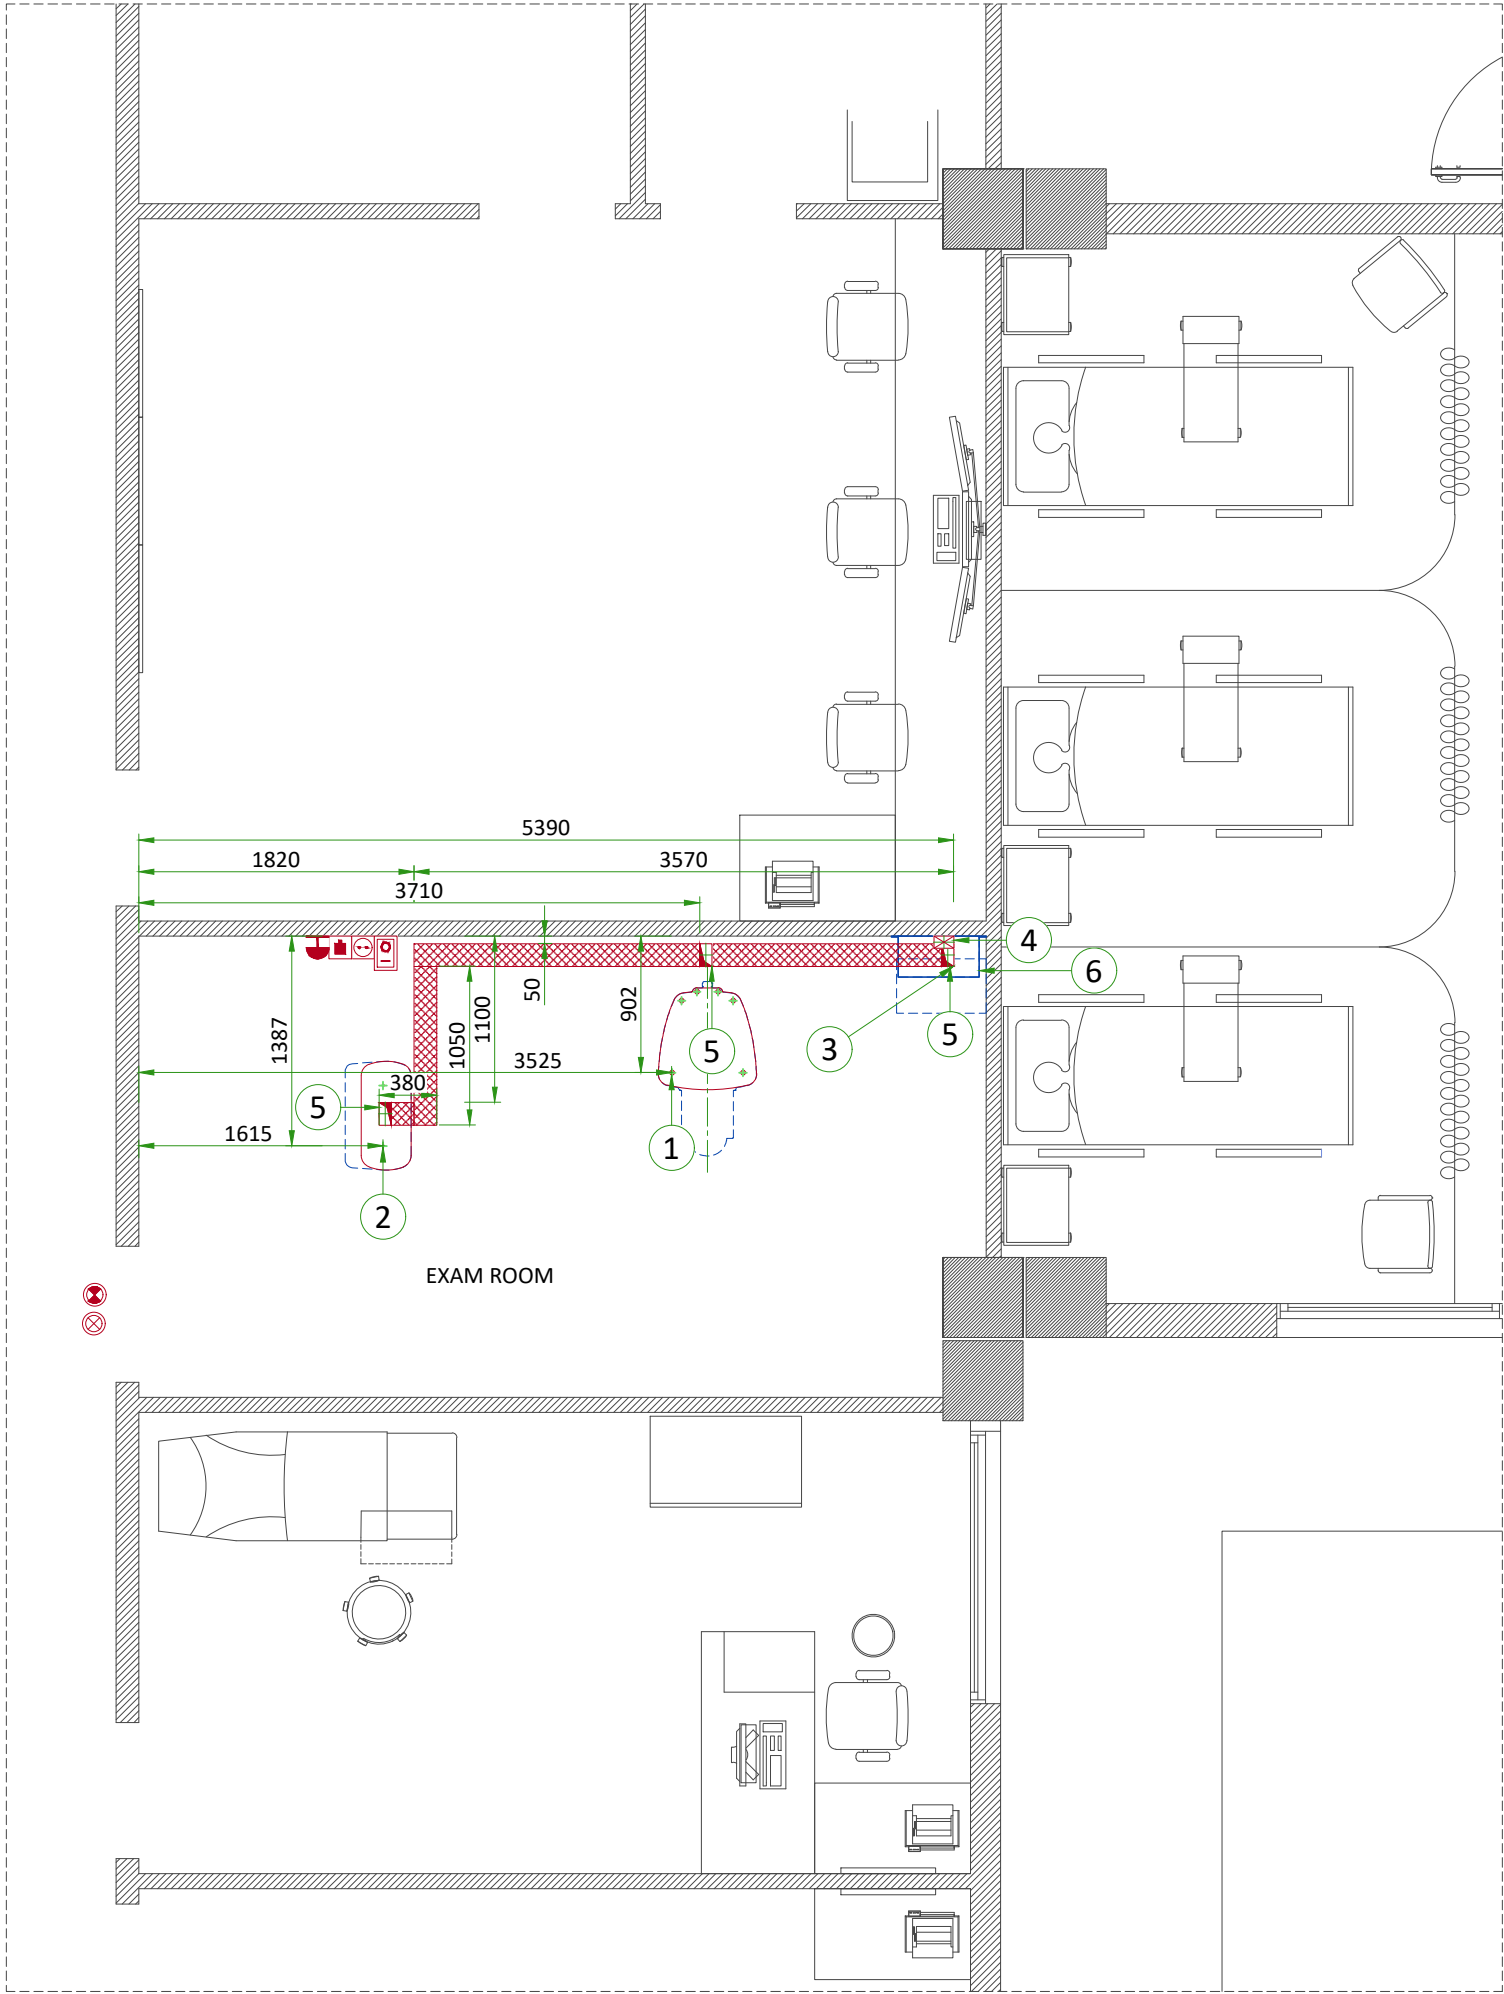


STRUCTURAL - ELECTRICAL LAYOUT


ITEM	QTY	DESCRIPTION
1		Gantry anchoring (see Floor & Wall Struct Details)
2		Control station anchoring (see Floor & Wall Struct Details)
3		150x80 flush floor duct
4		130x80 vertical duct from floor to PDB
5		150x80 cable inlet on the flush floor duct
6		Power Distribution Box (PDB)
		Electrical outlet 10/16A 230V + G
		RJ 45 network socket
		System emergency off (SEO), (recommended height 1.50m-1.85m above floor)
		X-Ray ON lamp (L1) - 24V
		System ON light (L) - 24V
		System remote control (Y), locked when power OFF "ON" and "OFF" impulse buttons with indicator lamps red=ON / green=OFF located at 1.50m above floor
		Flush floor duct

ANCHORING TO THE FLOOR

GANTRY

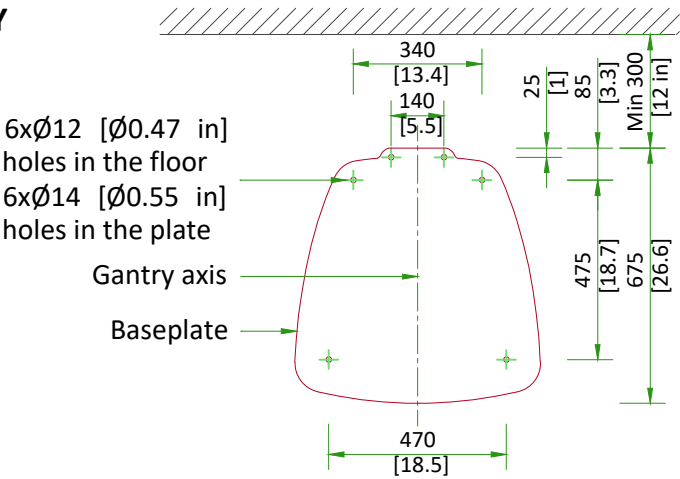

CONTROL STATION

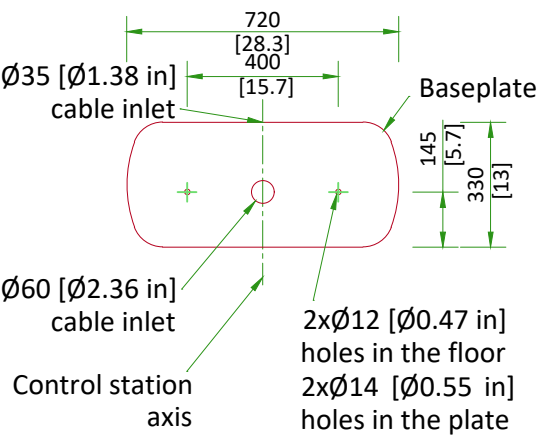


- Anchors are supplied by GE
- Inserts to be used: Hilti M8/20 HSL-4
- Minimum hole depth in the floor: 80 mm [3.2 in]
- Minimum floor thickness: 120 mm [3.9 in]
- Recommended tightening torque: 15 Nm
- The floor must be stable and flat, and sufficiently strong to accept masses as defined below without distortion beyond the tolerance given:
  - The worst case mass of the complete Gantry / Control station is 308.6 kg [680.3 lb]±10% / 97.2 kg [214.3 lb]±10%
  - The bearing surface of the Gantry / Control Station base plate is 0.35 m² [3.78 ft²] / 0.22 m² [2.37 ft²]


NOT TO SCALE

TYPICAL CABLE MANAGEMENT

FLUSH FLOOR DUCT

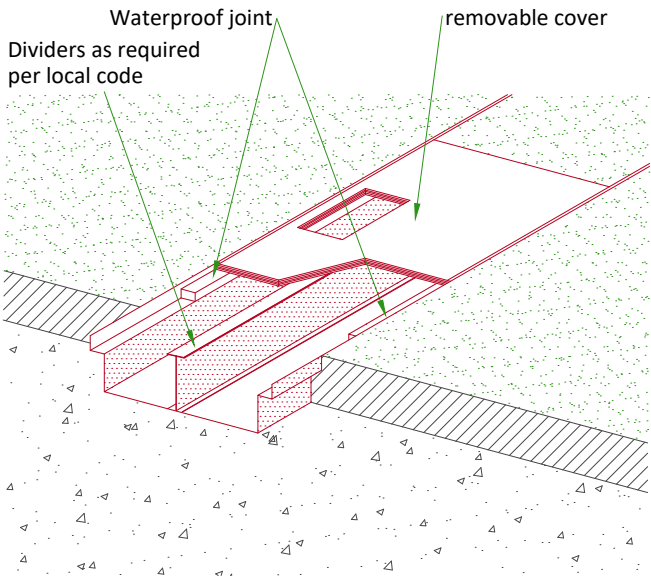


VERTICAL DUCT ON WALL

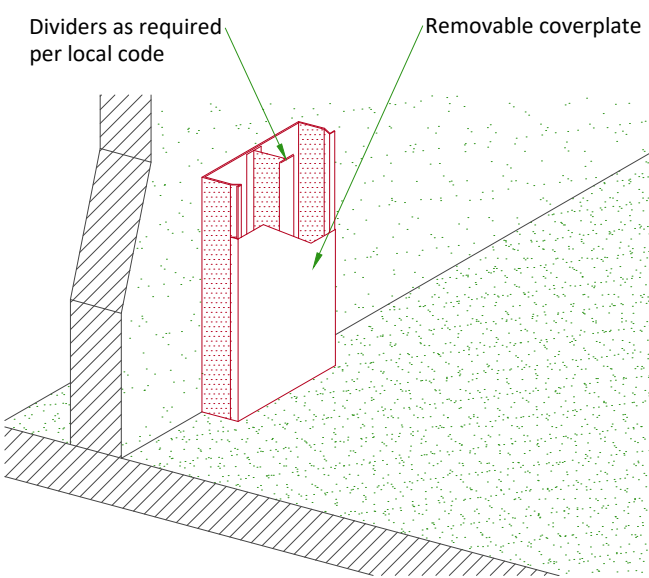

NOT TO SCALE

ROOM HEIGHT REQUIREMENTS

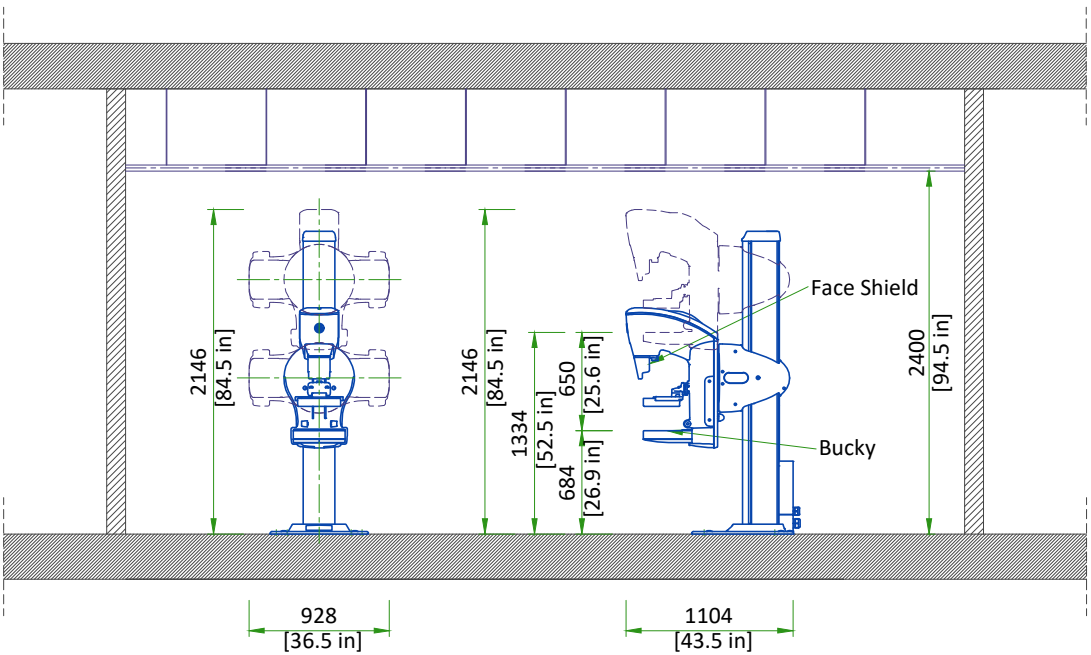

TUBE HEAD MAXIMUM HEIGHT	ROTATED C-ARM MAXIMUM HEIGHT	MAXIMUM HEIGHT FOR SERVICE ABILITY	MINIMUM CEILING HEIGHT
2146 mm [84.5 in]	2146 mm [84.5 in]	2262 mm [89.1 in]	2400 mm [94.5 in]

# POWER AND NETWORK REQUIREMENTS

## POWER SUPPLY

POWER SUPPLY		SINGLE PHASE + GROUND
VOLTAGES		220/230 V ± 10%
MAXIMUM INSTANTANEOUS POWER (DURING EXPOSURES)		6.9 kVA
MAXIMUM POWER IN STANDBY		0.5 kVA
FREQUENCIES		50/60 Hz ± 1 Hz
LINE IMPEDANCE	Distribution transformer	0.339 Ohm
	Each feeder cable	0.095 Ohm
	Generator input terminal	0.625 Ohm

- TNS neutral point connection recommended (TNC neutral point connection must not be used)
- Power supply should come into a Power Distribution Box (PDB) containing the protective units and controls.
- The section of the supply cable should be calculated in accordance with its length and the maximum permissible voltage drops.
- There must be discrimination between supply cable protective device at the beginning of the installation (Main low-voltage transformer side) and the protective devices in the PDB.

## SUPPLY CHARACTERISTICS

- Power input must be separated from any others which may generate transients (elevators, air conditioning, radiology rooms equipped with high speed film changers...)
- All equipment (lighting, power outlets, etc...) installed with GE system components must be powered separately.

## GROUND SYSTEM

- Equipotential : the equipotential link will be by means of an equipotential bar.  
This equipotential bar should be connected to the protective earth conductors in the ducts of the non GE cableways and to additional equipotential connections linking up all the conducting units in the rooms where GE units are located.

## CABLES


- Power and cable installation must comply with the distribution diagram below.
- All cables must be isolated and flexible.
- Cable color codes must comply with standards for electrical installation.
- Case PDB furnished by GE : the cables for signals and remote control (Y, SEO, L...) will go to PDB with a pigtail length of 1.5m, and will be connected during installation. Each conductor will be identified and isolated (screw connector).
- The ligne supply cable from the generator must be internally and permanently connected to the hospital power distribution box and cannot be externally connected to the Power Distribution Box via a plug. The internal and permanent connection must be made in a way such the line supply cable can only be disconnected by use of a tool.

## CABLEWAYS

The general rules for laying cableways should meet the conditions laid down in current standards and regulations, with regard to :

- Protecting cables against water (cableways should be waterproof)
- Protecting cables against abnormal temperatures (proximity to heating pipes or ducts)
- Protecting cables against temperature shocks
- Replacing cables (cableways should be large enough for cables to be replaced). Metal cableways should be grounded.

# POWER DISTRIBUTION

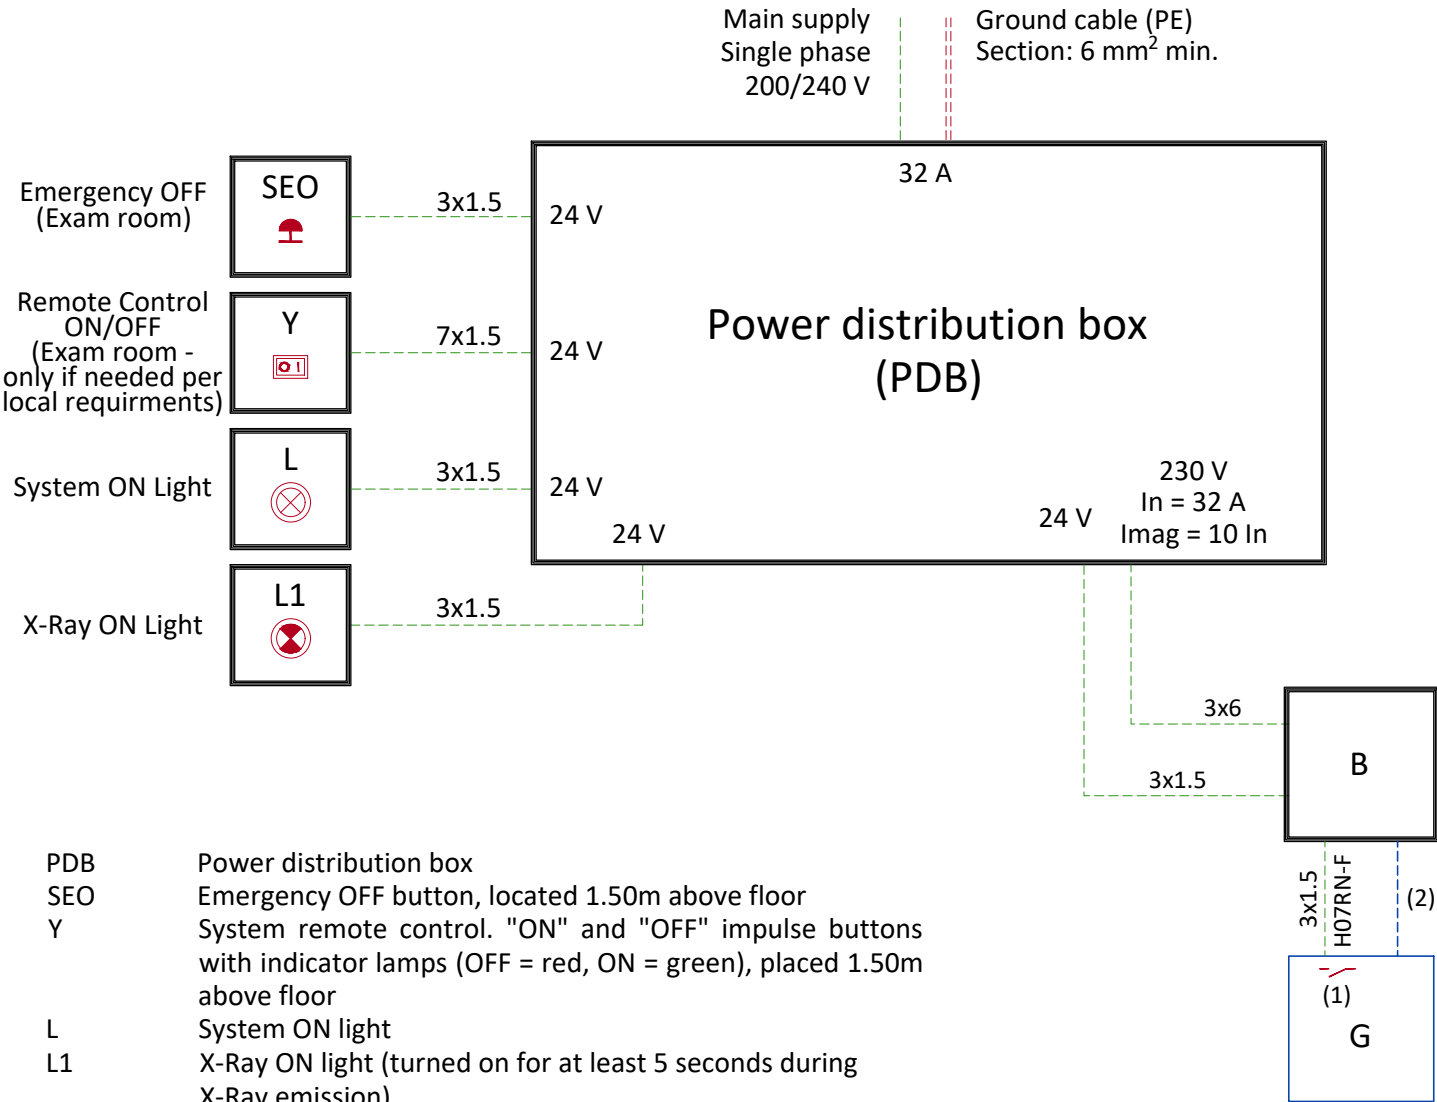

- PDB Power distribution box  
SEO Emergency OFF button, located 1.50m above floor  
Y System remote control. "ON" and "OFF" impulse buttons with indicator lamps (OFF = red, ON = green), placed 1.50m above floor  
L System ON light  
L1 X-Ray ON light (turned on for at least 5 seconds during X-Ray emission)  
B Junction box  
G Wall duct guided cables are housed in a junction box  
Generator cabinet


## Notes :

- (1) Two dry contacts: "System ON" and "X-Ray ON", both released by the generator cabinet.  
Max. voltage = 30 V  
(2) 2 x AWG12 (3.3 mm<sup>2</sup> / Ph + N) + 1 x AWG10 (5.3mm<sup>2</sup> / Earth) cable with 9.5 m usable length, supplied with the system

- Cable SUPPLIED BY CUSTOMER  
--- Cable SUPPLIED BY GE  
--- Equipment SUPPLIED BY CUSTOMER  
--- Equipment SUPPLIED BY GE

PDB SCHEMATICS AND DETAILS THAT APPEAR ON THIS PAGE ARE THE PROPERTY OF "GE MEDICAL SYSTEMS FRANCE"

DETAILED SCHEMATICS OF POWER DISTRIBUTION BOX

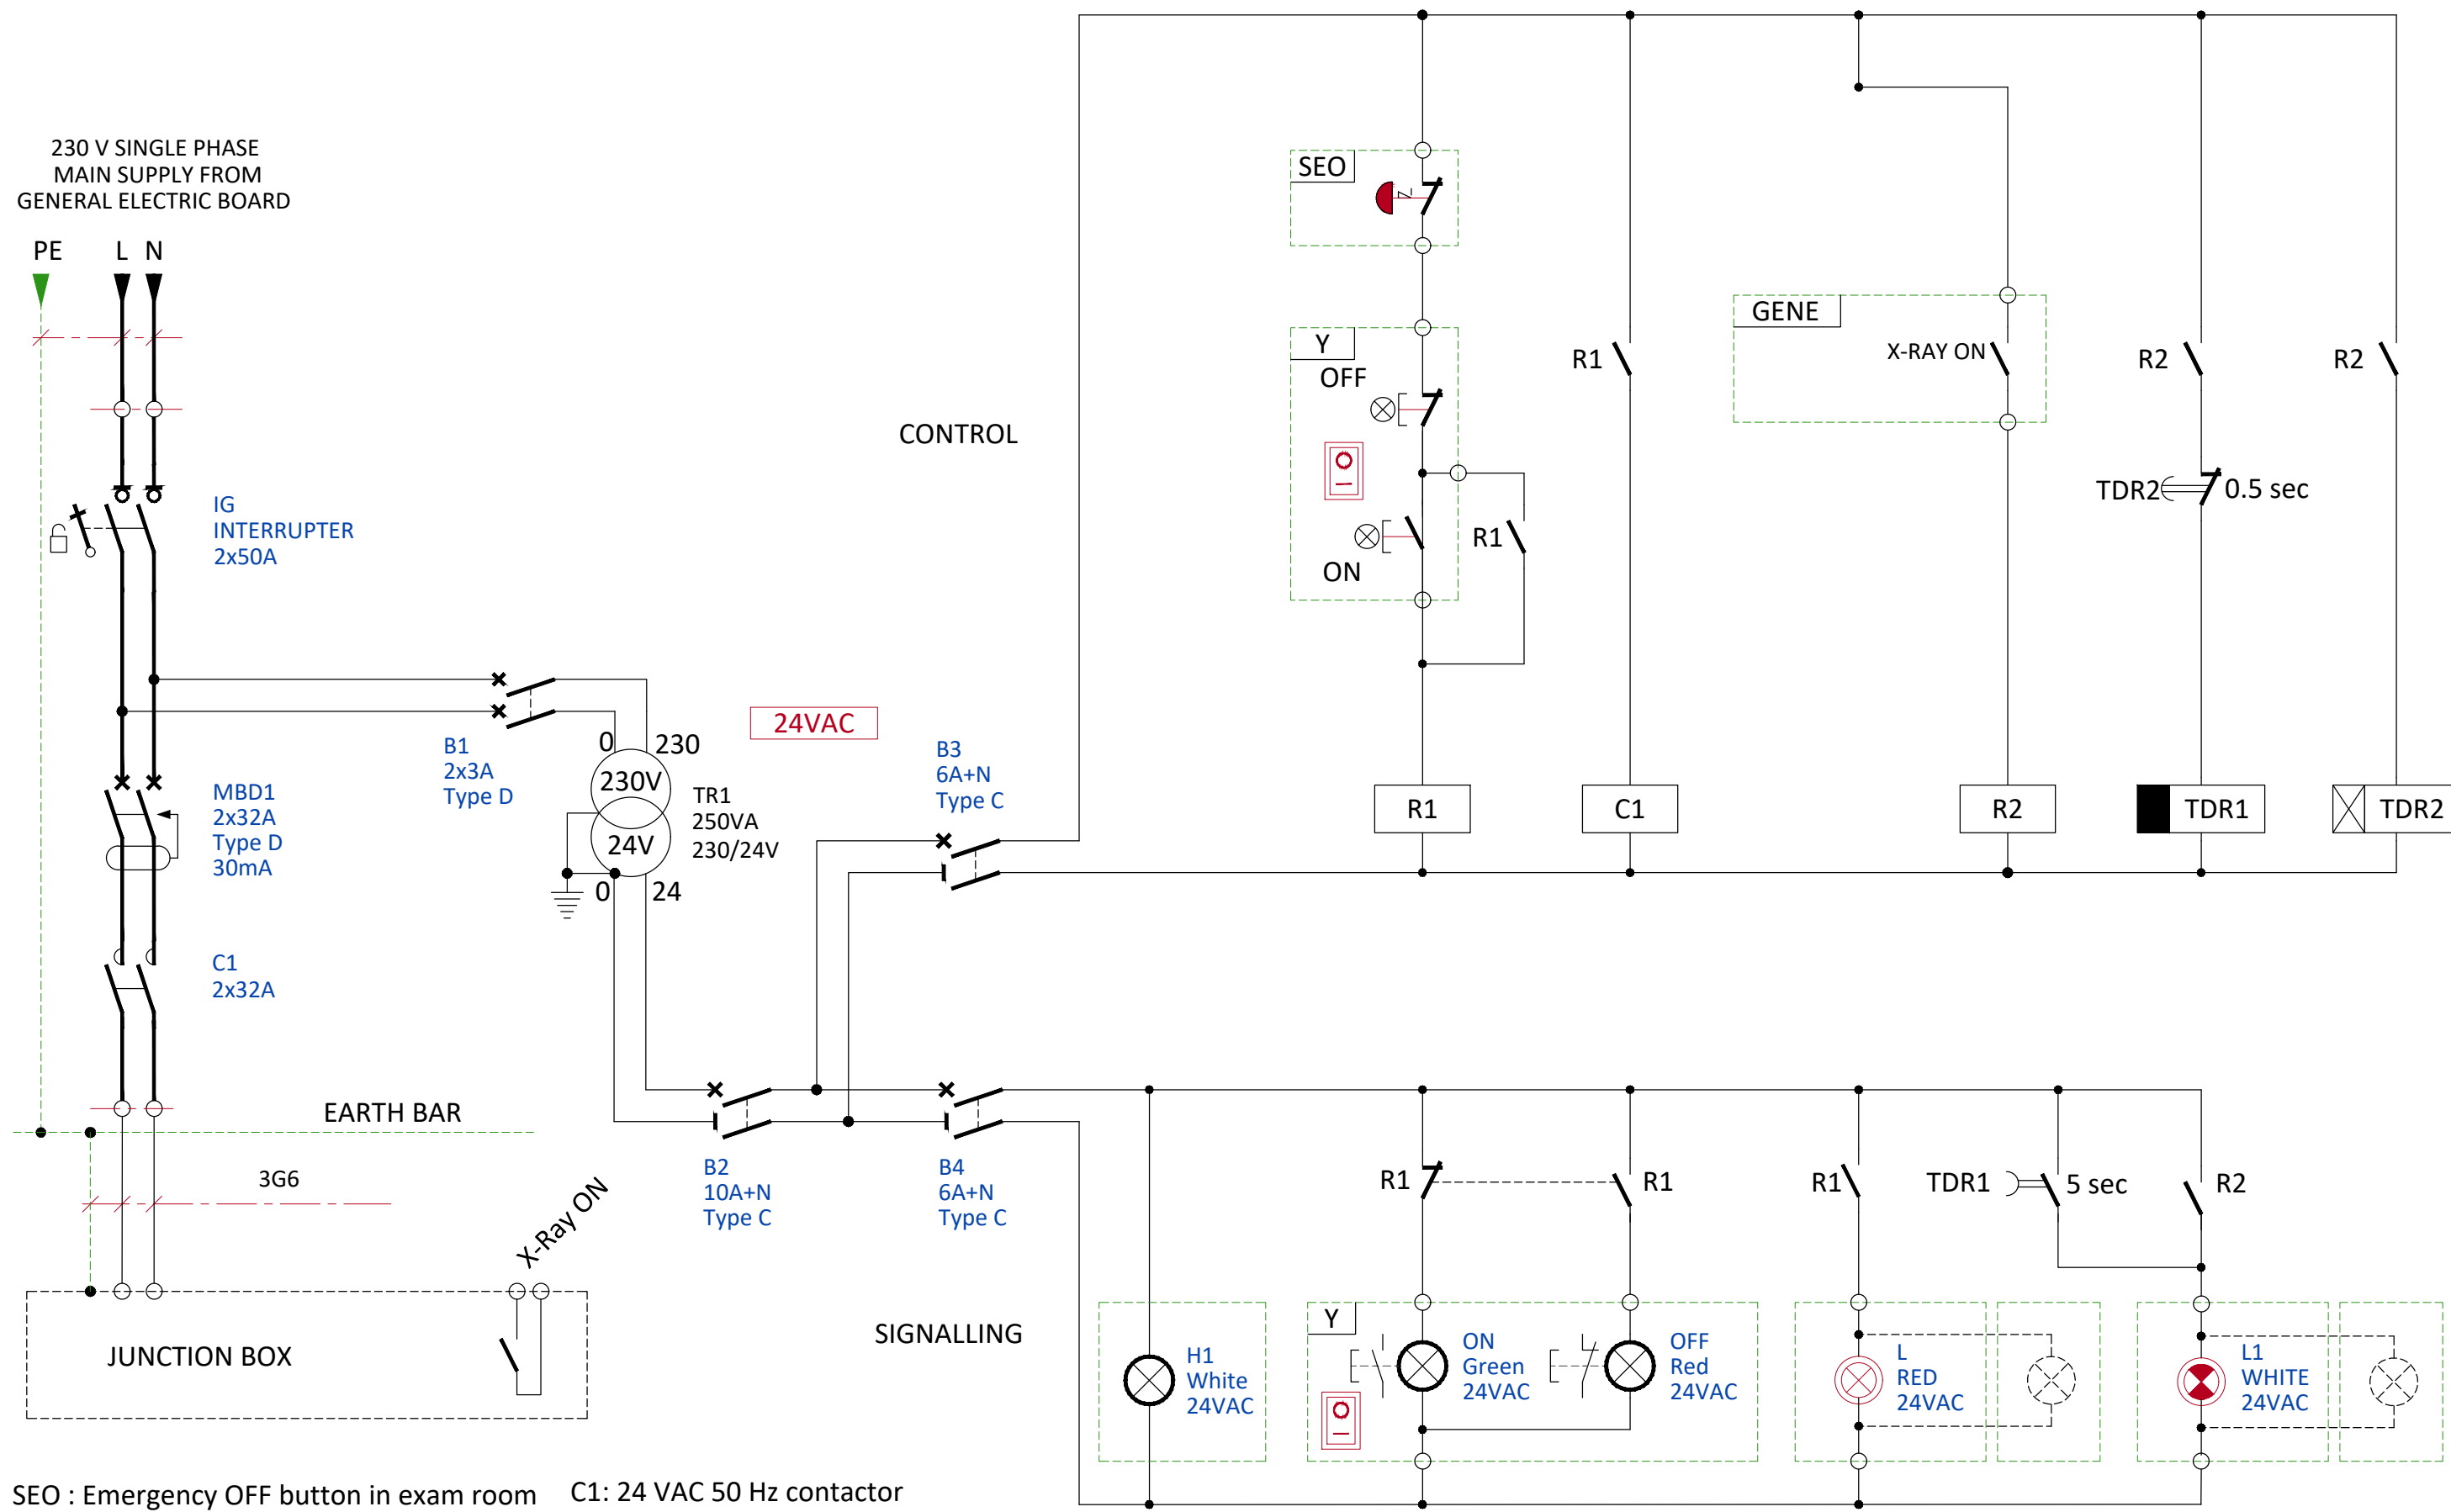

SEO : Emergency OFF button in exam room  
Y : System remote control in control room  
H1 : On the door of PDB unit  
MBD1: D type magnetic breaker

C1: 24 VAC 50 Hz contactor  
B1/B2/B3/B4: Circuit breaker  
R1/R2/R3: 24 VAC 50 Hz relay  
TDR1/TDR2: 24 V 50 Hz time delay relay with switch-off/switch-on delay

PDB SCHEMATICS AND DETAILS THAT APPEAR ON THIS PAGE  
ARE THE PROPERTY OF "GE MEDICAL SYSTEMS FRANCE"



TEMPERATURE AND HUMIDITY SPECIFICATIONS

IN-USE CONDITIONS

Environmental conditions must ensure patient and operator comfort and must be maintained within the range below:

Temperature	Min	Recommended	Max
	15°C [59°F]	23°C ± 3°C [73°F ± 5°F]	30°C [86°F]
Relative humidity (1)	10% to 80%		
Atmospheric pressure	700 hPa to 1060 hPa		
System heat dissipation	Average		
	0.44 kW [1507 BTU/h]		

STORAGE CONDITIONS

Temperature	-5°C to +40°C [23°F to 104°F]
Atmospheric pressure	500 hPa to 1060 hPa
Relative humidity (1)	10% to 95%

Storage for less than 5 days.  
(1) Non-condensing

AIR RENEWAL

According to local standards.

NOTE  
In case of using air conditioning systems that have a risk of water leakage it is recommended not to install it above electric equipment or to take measures to protect the equipment from dropping water.

ENVIRONMENTAL SPECIFICATIONS

MAGNETIC INTERFERENCE

- In order to avoid interference on the Senographe system, static field limits from the surrounding environment are specified.
- Static field is specified as less than 1 Gauss in the Examination room (Gantry room), and the Control Area (for all Subsystems).
  - Static field is specified as less than 3 Gauss in the Technical Room.


LIGHT REQUIREMENTS

In order to obtain a room brightness value of 160 lux or less for correct viewing of monitor images, the room lights must be equipped with a dimmer switch. Shades and/or drapes must be fitted to windows.

ALTITUDE

Operating altitude: from 0 m [0 ft] to 3000 m [9,843 ft].

EQUIPMENT DIMENSIONS

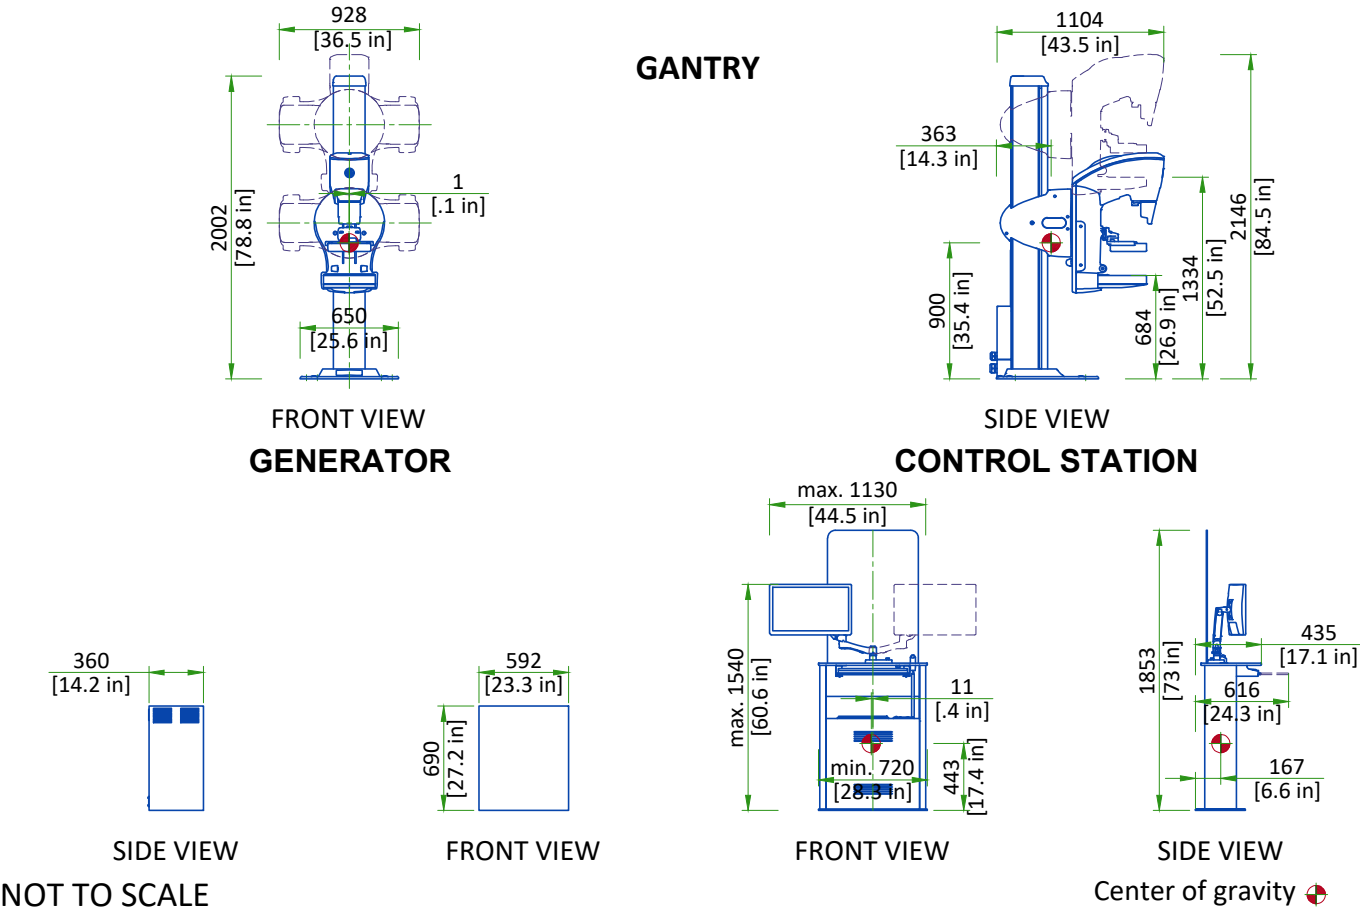


CONNECTIVITY REQUIREMENTS

- Your new GE Healthcare imaging modality will require local and remote connectivity to enable our full range of digital support:
- Local connectivity - This allows your system to connect to local devices such as PACS and modality worklist. We will require network information to configure the system(s), and a live ethernet port(s) prior to the delivery of the system(s).
  - Remote connectivity - Your GE Healthcare service warranty includes InSite™ (applicable to InSite capable products), a powerful broadband-based service which enables digital tools that can help guard your hospital against equipment downtime and revenue loss by quickly connecting you to a GE Healthcare expert.

- Depending on product family and software version, imaging systems can be connected in one of the following methods:
1. TLS over TCP Port 443 (Preferred method for new products) via:
    - a. DNS resolution
    - b. Customer-provided Proxy or
    - c. GE Proxy (Available in some regions)
  2. Site-to-Site IPsec VPN tunnel

Please provide the GE project manager with the contact information for the resource that can provide information required to set up these connections. GEHC will send out communication to these contacts, which will include the project's Connectivity requirements, and a Connectivity form. This form will need to be completed and returned to GEHC prior to delivery of the system to ensure the system is tested and connectivity is enabled prior to the completion of the installation.

INTERCONNECTION

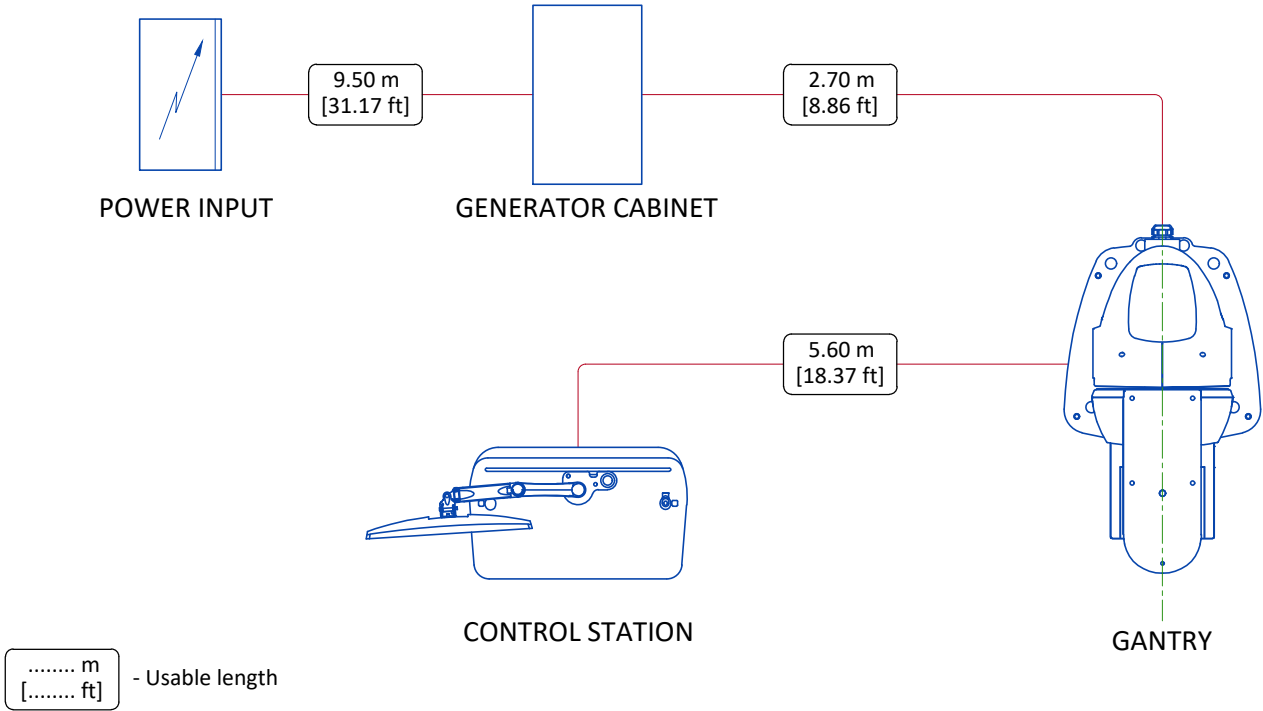

NOT TO SCALE

DELIVERY

THE CUSTOMER MUST :

- Provide an area, adjacent to the GE suite, for delivery and unloading of the GE equipment.
- Ensure that the dimensions of all doors, corridors, ceiling heights, are sufficient to accommodate the movement of GE equipment from the delivery area to the specific rooms of the GE site.
- Ensure that the access route will accommodate the weights of the equipment and any transportation, lifting and rigging equipment,
- If the parking and dock facilities are on property which does not belong to the customer, ensure that all necessary steps have been taken to ensure their temporary use by GE.

DIMENSIONS		
	CRATE 1	CRATE 2
DEPTH (mm [in])	2280 [89.76]	698.5 [27.50]
WIDTH (mm [in])	1400 [55.12]	622.3 [24.50]
HEIGHT (mm [in])	1550 [61.02]	428.6 [16.87]
WEIGHT (kg [lb])	765 [1686.5] ± 10%	19.575 [43.2] ± 10%

DELIVERY WITH DOLLIES

Minimum dimensions for door :  
Width 750 mm [29.52 in]  
Height 2136 mm [84.09 in] (2002 mm [78.81 in] with gantry's top cover, without dolly)



DISCLAIMER

GENERAL SPECIFICATIONS

- GE is not responsible for the installation of developers and associated equipment, lighting, cassette trays and protective screens or derivatives not mentioned in the order.
- The final study contains recommendations for the location of GE equipment and associated devices, electrical wiring and room arrangements. When preparing the study, every effort has been made to consider every aspect of the actual equipment expected to be installed.
- The layout of the equipment offered by GE, the dimensions given for the premises, the details provided for the pre-installation work and electrical power supply are given according to the information noted during on-site study and the wishes expressed by the customer.
- The room dimensions used to create the equipment layout may originate from a previous layout and may not be accurate as they may not have been verified on site. GE cannot take any responsibility for errors due to lack of information.
- Dimensions apply to finished surfaces of the room.
- Actual configuration may differ from options presented in some typical views or tables.
- If this set of final drawings has been approved by the customer, any subsequent modification of the site must be subject to further investigation by GE about the feasibility of installing the equipment. Any reservations must be noted.
- The equipment layout indicates the placement and interconnection of the indicated equipment components. There may be local requirements that could impact the placement of these components. It remains the customer's responsibility to ensure that the site and final equipment placement complies with all applicable local requirements.
- All work required to install GE equipment must be carried out in compliance with the building regulations and the safety standards of legal force in the country concerned.
- These drawings are not to be used for actual construction purposes. The company cannot take responsibility for any damage resulting therefrom.

CUSTOMER RESPONSIBILITIES

- It is the responsibility of the customer to prepare the site in accordance with the specifications stated in the final study. A detailed site readiness checklist is provided by GE. It is the responsibility of the customer to ensure all requirements are fulfilled and that the site conforms to all specifications defined in the checklist and final study. The GE Project Manager of Installation (PMI) will work in cooperation with the customer to follow up and ensure that actions in the checklist are complete, and if necessary, will aid in the rescheduling of the delivery and installation date.
- Prior to installation, a structural engineer of record must ensure that the floor and ceiling is designed in such a way that the loads of the installed system can be securely borne and transferred. The layout of additional structural elements, dimensioning and the selection of appropriate installation methods are the sole responsibility of the structural engineer. Execution of load bearing structures supporting equipment on the ceiling, floor or walls are the customer's responsibility.

RADIO-PROTECTION

- Suitable radiological protection must be determined by a qualified radiological physicist in conformation with local regulations. GE does not take responsibility for the specification or provision of radio-protection.

THE UNDERSIGNED, HEREBY CERTIFIES THAT I HAVE READ AND APPROVED THE PLANS IN THIS DOCUMENT.		
DATE	NAME	SIGNATURE

CUSTOMER SITE READINESS REQUIREMENTS

REQUIRED MANUALS FOR SYSTEM PRE-INSTALLATION	
Description	Document Number*
Product specific Pre-installation Manual	Refer to cover page
*documents can be accessed in multiple languages at <a href="https://customer-doc.cloud.gehealthcare.com/#/cdp/dashboard">https://customer-doc.cloud.gehealthcare.com/#/cdp/dashboard</a>	

- A mandatory component of this drawing set is the GE Healthcare Pre-installation manual. Failure to reference the Pre-installation manual will result in incomplete documentation required for site design and preparation.
- The items on the GE Healthcare Site Readiness Checklist **DOC1809666** are REQUIRED to facilitate equipment delivery to the site. Equipment will not be delivered if these requirements are not satisfied.
  - Any deviation from these drawings must be communicated in writing to and reviewed by your local GE Healthcare installation project manager prior to making changes.
  - Make arrangements for any rigging, special handling, or facility modifications that must be made to deliver the equipment to the installation site. If desired, your local GE Healthcare installation project manager can supply a reference list of rigging contractors.
  - New construction requires the following;
    1. Secure area for equipment,
    2. Power for drills and other test equipment,
    3. Restrooms.
  - Provide for refuse removal and disposal (e.g. crates, cartons, packing)
  - For CT systems it is required to minimize vibrations within the scan room. It is the customer's responsibility to contract a vibration consultant/engineer to implement site design modifications to meet the GE vibration specification. Refer to the system Pre-installation manual for vibration specifications.